

TD DUST COLLECTOR

MODELS TD-162, TD-486 AND TD-573





TD-162

TD-486


TD-573

Standard and high pressure pulse-jet dust collectors provide on-line filter cleaning allowing continuous-duty operation.¹

- Ultra-Web[®] cartridge filters featuring fine fiber technology optimize high filtration efficiency and long filter life
- MERV* 15 filtration efficiency rating per ASHRAE 52.2-2007
- The compact design is ideal for bin venting applications where space is at a premium
- Lower operating pressure drop reduces energy costs

- Optional tangential inlet on round TD housings preseparates dust for high-loading applications
- Provides a cleaner work environment for maximum productivity
- Helps support OSHA Clean Air Standards

[†] Donaldson Torit equipment is designed to IBC guidelines for specific wind speed exposure and seismic spectral acceleration at grade level. Contact your Donaldson Torit representative for detailed information available on the equipment's Spec Control drawings. Equipment may be customized to meet unique, customer-specified site requirements.

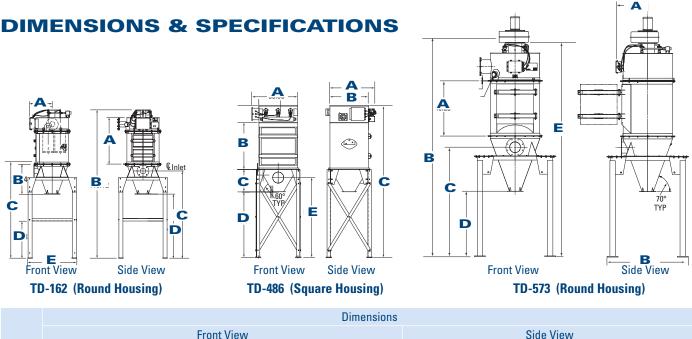

Model	Front View									Side View								
wouer	А		В		С		D		E		А		В		С		D	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
TD-162	17.2	436.4	23.8	605.5	71.5	1816.9	27.9	708.2	36.5	927.1	25.1	636.5	110.1	2797.0	62.5	1587.5	45.2	1147.6
TD-486	33.4	847.9	34.0	863.6	16.5	419.1	48.0	1219.2	58.5	1485.9	32.8	831.9	38.1	968.2	111.3	2825.8		-
TD-573	40.3	1022.4	139.7	3547.9	80.4	2041.7	48.0	1219.2	157.1	3989.3	23.4	594.4	59.6	1514.3		-		-

Model	Nominal	Airflow**	Ultra-Web®	Filter Area	No. of Filters	No. of Valves	Housin	g Rating	Shipping Weight	
	cfm	m³/h	ft²	m²			in. of H,O	mm of H,O	lb	kg
TD-162	300 - 400	510 - 579	180	16.7	3	3	-220	-5588	450	204.1
TD-486	700 - 1500	1189 - 2548	540	50.2	9	3	±20	±508	500	226.8
TD-573	1000 - 1100	1699 - 1869	678	63.0	3	3	-220	-5588	1350	612.3

EQUIPMENT OPTIONS

Cartridge filter options: • Ultra-Web FR (MERV 15) • Fibra-Web [®] (MERV 14) • Ultra-Web SB (MERV 15) • Ultra-Web SB (MERV 15)	Hopper discharge • Slide gate pack • 55-Gallon (15,59.2 Liter) • 5-Gallon (141.7 Liter) pail pack • Rotary airlock	determined through independent laboratory testing using ASHRAE 52.2 (2007) test standards. The MERV rating was determined at a face velocity of 118 feet per minute (30.0 meters per minute) and loading up to four inches (101.6 mm) water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency. ** Based on clean filters. t Magnehelic* and Photohelic* are registered trademarks of Dwyer Instruments, Inc.				
1, 2, 3, 5, 7.5, and 10 hp blowers	Magnehelic ^{®†} gauge	Significantly improve the performance of				
Solid-state timer	Photohelic®' gauge					
Adjustable damper (blower)	Bolt-on support legs	your collector with genuine Donaldson Torit replacement filters and parts. Call Donaldson Torit at 800-365-1331.				
Explosion vents	Inlet adapters					

Important Notice

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc. Minneapolis, MN

donaldsontorit.com • shop.donaldson.com

North America Email: donaldsontorit@donaldson.com Phone: (USA): +1-800-365-1331 • (MX): +1-800-343-36-39 Australasia Email: marketing.australia@donaldson.com Phone: +61-2-4350-2000

Toll Free: (AU) +1800-345-837 • (NZ) +0800-743-387 F118166 ENG (02/20) TD Dust Collector ©2011-2020 Donaldson Company, Inc. Donaldson, Torit, Fibra-Web, Torit-Tex, Ultra-Tek, Ultra-Web and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners.

China

Email: info.cn@donaldson.com Phone: +86-400-820-1038

Donaldson Europe B.V.B.A. Email: IAF-europe@donaldson.com Phone: +32-16-38-3811

India Email: info.difs@donaldson.com Phone: +91-124-4807-400 • +18001035018

Japan Email: jp-ndl.ifsweb@donaldson.com Phone: +81-42-540-4112

Korea Email: iaf-kr@donaldson.com Phone: +82-2-517-3333

* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been

Latinoamerica Email: IndustrialAir@donaldson.com Phone: +52-449-300-2442

South Africa Email: SAMarketing@donaldson.com Phone: +27-11-997-6000

Southeast Asia Email: IAF.SEA@donaldson.com Phone: +65-6311-7373